


Pignoni per bussole coniche
Taper bored sprockets
Kettenräder für spannbuchsen
Pignons a moyeu amovible
Piñones para casquillos cónicos



Pignoni per bussole coniche / Taper bored sprockets
Kettenräder für Spannbuchsen / Pignons à moyeu amovible
Piñones para casquillos cónicos



Versione (*) / Type (*)
Typ (*) / Tipo (*)

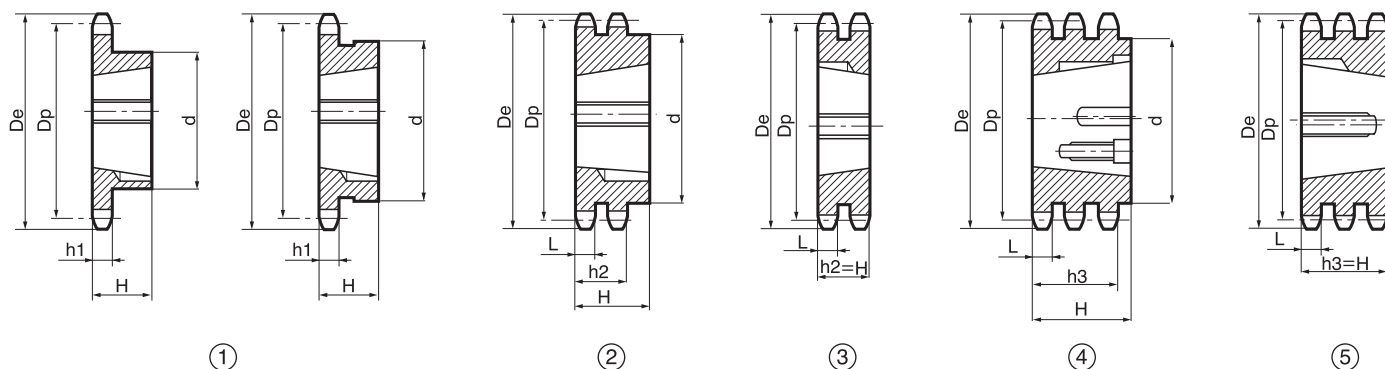

3/8" x 7/32" - 9,525 x 5,72 mm

06B - 1-2-3 - DIN 8187 - ISO/R 606

CATENA:	CHAIN:	KETTE:	CHAÎNE:	CADENA:	ISO mm
Passo	Pitch	Teilung	Pas	Paso	9,525
Larghezza interna	Internal width	Innere Breite	Largeur interieure	Ancho interno	5,720
Rullo ø	Roller ø	Rollen ø	ø du rouleau	Rodillo ø	6,350


PIGNONE	SPROCKETS	KETTENRÄDER	PIGNONS	PIÑONES	ISO mm
Raggio dente r	Tooth radius r	Radius r	Rayon de denture r	Radio diente r	r 10,0
Larghezza raggio C	Radius width C	Breite C	Largeur de rayon C	Ancho radio C	C 1,0
Largh. dente h ₁	Tooth width h ₁	Zahnbreite h ₁	Larg. de denture h ₁	Ancho diente h ₁	h₁ 5,3
Largh. dente L	Tooth width L	Zahnbreite L	Larg. de denture L	Ancho diente L	L 5,2
Largh. dente h ₂	Tooth width h ₂	Zahnbreite h ₂	Larg. de denture h ₂	Ancho diente h ₂	h₂ 15,4
Largh. dente h ₃	Tooth width h ₃	Zahnbreite h ₃	Larg. de denture h ₃	Ancho diente h ₃	h₃ 25,6

Acciaio Steel Stahl Acier Acero = C 45 E - UNI EN 10083-1


Z	D _e	D _p	TS					TD					TT				
			cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo	cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo	cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo
17	55,3	51,83	TS 05017	45*	22	1008	1	TD 05017	42	22	1008	2	TT 05017	-	25,6	1008	5
18	58,3	54,85	TS 05018	45*	22	1008	1	TD 05018	43	22	1008	2	TT 05019	-	25,6	1008	5
19	61,3	57,87	TS 05019	45	22	1008	1	TD 05019	46	22	1008	2		-	25,6	1008	5
20	64,3	60,89	TS 05020	46	22	1008	1	TD 05020	48	22	1008	2	TT 05021	-	25,6	1008	5
21	68,0	63,91	TS 05021	46	22	1008	1	TD 05021	49	22	1008	2		-	25,6	1008	5
22	71,0	66,93	TS 05022	50	22	1108	1	TD 05022	52	22	1108	2	TT 05023	-	25,6	1210	5
23	73,5	69,95	TS 05023	63*	25	1210	1	TD 05023	59	25	1210	2		-	25,6	1210	5
24	77,0	72,97	TS 05024	63	25	1210	1	TD 05024	61	25	1210	2	TT 05025	-	25,6	1210	5
25	80,0	76,02	TS 05025	63	25	1210	1	TD 05025	64	25	1210	2		-	25,6	1210	5
26	83,0	79,02	TS 05026	63	25	1210	1	TD 05026	65	25	1210	2	TT 05027	-	25,6	1210	5
27	86,0	82,02	TS 05027	63	25	1210	1	TD 05027	70	25	1210	2		-	25,6	1210	5
28	89,0	85,07	TS 05028	63	25	1210	1	TD 05028	70	25	1210	2	TT 05030	79	38,0	1615	4
30	94,7	91,12	TS 05030	63	25	1210	1	TD 05030	75	25	1210	2		90	38,0	1615	4
38	119,5	115,35	TS 05038	70	25	1210	1	TD 05038	80	25	1610	2	TT 05038	90	38,0	1615	4
45	140,7	136,55	TS 05045	70	25	1210	1	TD 05045	80	25	1610	2					
57	176,9	172,91	TS 05057	70	25	1210	1	TD 05057	80	25	1610	2					
76	234,9	230,49	TS 05076	70	25	1210	1	TD 05076	80	25	1610	2					
95	292,5	288,08	TS 05095	80	25	1210	1	TD 05095	90	25	1610	2					
114	349,5	345,68	TS 05114	80	38	1215	1	TD 05114	95	38	1615	2					




Versione (*) / Type (*)
Typ (*) / Tipo (*)




①




②




③



④



⑤



1/2" x 5/16" - 12,7 x 7,75 mm







08B - 1-2-3 - DIN 8187 - ISO/R 606

CATENA:	CHAIN:	KETTE:	CHAÎNE:	CADENA:	ISO mm
Passo	Pitch	Teilung	Pas	Paso	12,07
Larghezza interna	Internal width	Innere Breite	Largeur interieure	Ancho interno	7,75
Rullo ø	Roller ø	Rollen ø	ø du rouleau	Rodillo ø	8,51

PIGNONE	SPROCKETS	KETTENRÄDER	PIGNONS	PIÑONES	ISO mm
Raggio dente r	Tooth radius r	Radius r	Rayon de denture r	Radio diente r	r 13,0
Larghezza raggio C	Radius width C	Breite C	Largeur de rayon C	Ancho radio C	C 1,3
Largh. dente h ₁	Tooth width h ₁	Zahnbreite h ₁	Larg. de denture h ₁	Ancho diente h ₁	h₁ 7,2
Largh. dente L	Tooth width L	Zahnbreite L	Larg. de denture L	Ancho diente L	L 7,0
Largh. dente h ₂	Tooth width h ₂	Zahnbreite h ₂	Larg. de denture h ₂	Ancho diente h ₂	h₂ 21,0
Largh. dente h ₃	Tooth width h ₃	Zahnbreite h ₃	Larg. de denture h ₃	Ancho diente h ₃	h₃ 34,9

Acciaio Steel Stahl Acier Acero = C 45 E - UNI EN 10083-1

Z	D _e	D _p	TS					TD					TT				
			cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo	cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo	cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo
15	65,5	61,90	TS 09015	45	22	1008	1	TD 09015	46	22	1008	2	TT 09015	-	34,9	1008	5
16	69,5	65,10	TS 09016	50	22	1108	1	TD 09016	50	22	1108	2					
17	73,6	69,11	TS 09017	60*	25	1210	1	TD 09017	56	25	1210	2	TT 09017	-	34,9	1210	5
18	77,8	73,14	TS 09018	60*	25	1210	1	TD 09018	60	25	1210	2					
19	81,7	77,16	TS 09019	63	25	1210	1	TD 09019	62	25	1210	2	TT 09019	-	34,9	1210	5
20	85,8	81,19	TS 09020	71*	25	1610	1	TD 09020	66	25	1610	2					
21	89,7	85,22	TS 09021	71	25	1610	1	TD 05021	70	25	1610	2	TT 09021	-	34,9	1610	5
22	93,8	89,24	TS 09022	71	25	1610	1	TD 09022	76	25	1610	2					
23	98,2	93,27	TS 09023	76	25	1610	1	TD 09023	79	25	1610	2	TT 09023	-	34,9	1610	5
24	101,8	97,29	TS 09024	76	25	1610	1	TD 09024	84	25	1610	2					
25	105,8	101,33	TS 09025	76	25	1610	1	TD 09025	87	32	2012	2	TT 09025	-	34,9	2012	5
26	110,0	105,36	TS 09026	76	25	1610	1	TD 09026	87	32	2012	2					
27	114,4	109,40	TS 09027	76	25	1610	1	TD 09027	87	32	2012	2	TT 09027	-	34,9	2012	5
28	118,0	113,42	TS 09028	90	32	2012	1	TD 09028	87	32	2012	2					
30	126,1	121,50	TS 09030	90	32	2012	1	TD 09030	87	32	2012	2	TT 09030	-	34,9	2012	5
38	158,6	153,80	TS 09038	90	32	2012	1	TD 09038	100	32	2012	2	TT 09038	-	34,9	2012	5
45	188,0	182,07	TS 09045	100	32	2012	1	TD 09045	100	32	2012	2					
57	236,4	230,54	TS 09057	100	32	2012	1	TD 09057	100	32	2012	2					
76	313,3	307,33	TS 09076	100	32	2012	1	TD 09076	100	32	2012	2					
95	390,1	384,11	TS 09095	100	32	2012	1	TD 09095	100	32	2012	2					
114	466,9	460,90	TS 09114	110	45	2517	1	TD 09114	110	45	2517	2					

**Typ (*) / Tipo (*)**

①

②

③

④

⑤

10B - 1-2-3 - DIN 8187 - ISO/R 606







PIGNONE	SPROCKETS	KETTENRÄDER	PIGNONS	PIÑONES	ISO mm
Raggio dente r	Tooth radius r	Radius r	Rayon de denture r	Radio diente r	r 16,0
Larghezza raggio C	Radius width C	Breite C	Largeur de rayon C	Ancho radio C	C 1,6
Largh. dente h ₁	Tooth width h ₁	Zahnbreite h ₁	Larg. de denture h ₁	Ancho diente h ₁	h₁ 9,1
Largh. dente L	Tooth width L	Zahnbreite L	Larg. de denture L	Ancho diente L	L 9,0
Largh. dente h ₂	Tooth width h ₂	Zahnbreite h ₂	Larg. de denture h ₂	Ancho diente h ₂	h₂ 25,5
Largh. dente h ₃	Tooth width h ₃	Zahnbreite h ₃	Larg. de denture h ₃	Ancho diente h ₃	h₃ 42,1

Acciaio			Steel					Stahl				Acier				Acero = C 45 E - UNI EN 10083-1																	
Z	D _e	D _p	TS					TD					TT																				
			cod.	d	H	per Bussola für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo	cod.	d	H	per Bussola für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo	cod.	d	H	per Bussola für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo																
13	73,0	66,32	TS 10013	47	22	1008	1	TD 10013	-	25,5	1108	3	TT 10015	-	42,1	1210	5																
14	78,0	71,34	TS 10014	52	22	1108	1	TD 10015	-	25,5	1210	3		TT 10017	-	42,1	1210	5															
15	83,0	76,36	TS 10015	60	25	1210	1		TD 10017	-	25,5	1610			3	TT 10019	-	42,1	1615	5													
16	88,0	81,37	TS 10016	70*	25	1610	1			TD 10019	-	25,5			1610		3	TT 10021	-	42,1	1615	5											
17	93,0	86,36	TS 10017	71*	25	1610	1				TD 10022	-			25,5		1610		3	TT 10023	-	42,1	2012	5									
18	98,3	91,42	TS 10018	75	25	1610	1					TD 10023			-		25,5		1610		3	TT 10025	-	42,1	2012	5							
19	103,3	96,45	TS 10019	75	25	1610	1								TD 10025		-		25,5		1610		3	TT 10027	-	42,1	2012	5					
20	108,4	101,49	TS 10020	75	25	1610	1										TD 10027		-		25,5		1610		3	TT 10030	-	42,1	2012	5			
21	113,4	106,52	TS 10021	76	25	1610	1												TD 10030		-		25,5		1610		3	TT 10038	-	42,1	2012	5	
22	118,0	111,55	TS 10022	76	25	1610	1														TD 10038		-		25,5		1610		3	TT 10045	-	42,1	2012
23	123,4	116,58	TS 10023	76	25	1610	1						TD 10038										-		25,5		1610		3		TT 10057	-	42,1
24	128,3	121,62	TS 10024	90	32	2012	1	TD 10038						90									32,0		2012		2		TT 10076			105	45,0
25	134,0	126,66	TS 10025	90	32	2012	1		TD 10038					90		32,0							2012		2		TT 10095					110	45,0
26	139,0	131,70	TS 10026	90	32	2012	1			TD 10038				90		32,0		2012					2		TT 10114							120	45,0
27	144,0	136,75	TS 10027	90	32	2012	1				TD 10038			108		45,0		2517		2			TT 10114									120	45,0
28	148,7	141,78	TS 10028	90	32	2012	1					TD 10038		108		45,0		2517		2		TT 10114										120	45,0
30	158,8	151,87	TS 10030	90	32	2012	1							TD 10038	108	45,0		2517		2				TT 10114								120	45,0
38	199,2	192,24	TS 10038	100	32	2012	1								TD 10038	108	45,0	2517		2						TT 10114						120	45,0
45	235,0	227,58	TS 10045	100	32	2012	1									TD 10038	108	45,0	2517	2								TT 10114				120	45,0
57	296,0	288,18	TS 10057	100	32	2012	1										TD 10038	108	45,0	2517	2									TT 10114		120	45,0
76	392,1	384,16	TS 10076	100	32	2012	1						TD 10038					108	45,0	2517	2										TT 10114	120	45,0
95	488,5	480,14	TS 10095	110	45	2517	1	TD 10038										108	45,0	2517	2								TT 10114			120	45,0
114	584,1	576,13	TS 10114	110	45	2517	1		TD 10038									108	45,0	2517	2						TT 10114					120	45,0

Pignoni per bussole coniche / Taper bored sprockets
Kettenräder für Spannbuchsen / Pignons à moyeu amovible
Piñones para casquillos cónicos



Versione (*) / Type (*)
Typ (*) / Tipo (*)



①

②

③

④

⑤

3/4" x 7/16" - 19,05 x 11,68 mm

12B - 1-2-3 - DIN 8187 - ISO/R 606


CATENA:	CHAIN:	KETTE:	CHAÎNE:	CADENA:	ISO mm
Passo	Pitch	Teilung	Pas	Paso	19,05
Larghezza interna	Internal width	Innere Breite	Largeur interieure	Ancho interno	11,68
Rullo ø	Roller ø	Rollen ø	ø du rouleau	Rodillo ø	12,07

PIGNONE	SPROCKETS	KETTENRÄDER	PIGNONS	PIÑONES	ISO mm
Raggio dente r	Tooth radius r	Radius r	Rayon de denture r	Radio diente r	r 19,0
Larghezza raggio C	Radius width C	Breite C	Largeur de rayon C	Ancho radio C	C 2,0
Largh. dente h ₁	Tooth width h ₁	Zahnbreite h ₁	Larg. de denture h ₁	Ancho diente h ₁	h₁ 11,1
Largh. dente L	Tooth width L	Zahnbreite L	Larg. de denture L	Ancho diente L	L 10,8
Largh. dente h ₂	Tooth width h ₂	Zahnbreite h ₂	Larg. de denture h ₂	Ancho diente h ₂	h₂ 30,3
Largh. dente h ₃	Tooth width h ₃	Zahnbreite h ₃	Larg. de denture h ₃	Ancho diente h ₃	h₃ 49,8


Acciaio Steel Stahl Acier Acero= C 45 E - UNI EN 10083-1

[illegible]


Pignoni per bussole coniche / Taper bored sprockets
Kettenräder für Spannbuchsen / Pignons à moyeu amovible
Piñones para casquillos cónicos




①




②



③



④



⑤

1" x 17,02 mm - 25,4 x 17,2 mm


16B - 1-2-3 - DIN 8187 - ISO/R 606

CATENA:	CHAIN:	KETTE:	CHAÎNE:	CADENA:	ISO mm
Passo	Pitch	Teilung	Pas	Paso	25,40
Larghezza interna	Internal width	Innere Breite	Largeur interieure	Ancho interno	17,02
Rullo ø	Roller ø	Rollen ø	ø du rouleau	Rodillo ø	15,88


PIGNONE	SPROCKETS	KETTENRÄDER	PIGNONS	PIÑONES	ISO mm
Raggio dente r	Tooth radius r	Radius r	Rayon de denture r	Radio diente r	r 26,0
Larghezza raggio C	Radius width C	Breite C	Largeur de rayon C	Ancho radio C	C 2,5
Largh. dente h ₁	Tooth width h ₁	Zahnbreite h ₁	Larg. de denture h ₁	Ancho diente h ₁	h ₁ 16,2
Largh. dente L	Tooth width L	Zahnbreite L	Larg. de denture L	Ancho diente L	L 15,8
Largh. dente h ₂	Tooth width h ₂	Zahnbreite h ₂	Larg. de denture h ₂	Ancho diente h ₂	h ₂ 47,7
Largh. dente h ₃	Tooth width h ₃	Zahnbreite h ₃	Larg. de denture h ₃	Ancho diente h ₃	h ₃ 79,6

Acciaio Steel Stahl Acier Acero = C 45 E - UNI EN 10083-1


Z	D _e	D _p	TS					TD					TT					
			cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo	cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo	cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos	Esecuz. tipo Type Typ Type Tpo	
13	117,0	106,12	TS 12013	73	25	1610	1	TD 12013	-	47,7	2012	3						
14	125,0	114,15	TS 12014	76	25	1610	1	TD 12015	-	47,7	2012	3						
15	133,0	122,17	TS 12015	76	25	1610	1											
16	141,0	130,20	TS 12016	90	32	2012	1											
17	149,0	138,22	TS 12017	90	32	2012	1	TD 12017	-	47,7	2517	3	TT 12017	-	79,6	2517	5	
18	157,0	146,28	TS 12018	108	45	2517	1	TD 12019	-	47,7	2517	3	TT 12019	-	79,6	3020	5	
19	165,2	154,33	TS 12019	108	45	2517	1											
20	173,2	162,38	TS 12020	108	45	2517	1											
21	181,2	170,43	TS 12021	110	45	2517	1	TD 12021	140	51,0	3020	2	TT 12021	-	79,6	3030	5	
22	189,3	178,48	TS 12022	110	45	2517	1	TD 12023	140	51,0	3020	2	TT 12023	-	79,6	3525	5	
23	197,5	186,53	TS 12023	110	45	2517	1											
24	205,5	194,59	TS 12024	110	45	2517	1											
25	213,5	202,66	TS 12025	110	45	2517	1											
26	221,6	210,72	TS 12026	110	45	2517	1	TD 12025	140	51,0	3020	2	TT 12025	-	79,6	3525	5	
27	229,6	218,79	TS 12027	110	45	2517	1	TD 12027	140	51,0	3020	2	TT 12027	-	79,6	3525	5	
28	237,7	226,85	TS 12028	110	45	2517	1	TD 12030	140	51,0	3020	2	TT 12030	-	79,6	3525	5	
30	254,0	243,00	TS 12030	140	51	3020	1											
38	320,7	307,59	TS 12038	140	51	3020	1											
45	377,1	364,13	TS 12045	140	51	3020	1											
57	474,0	461,07	TS 12057	140	51	3020	1	TD 12057	175	65,0	3525	2	TT 12057	216	79,6	4030	4	
76	627,0	614,65	TS 12076	140	51	3020	1	TD 12076	175	65,0	3525	2	TT 12076	216	79,6	4030	4	
95	781,1	768,22	TS 12095	140	51	3020	1	TD 12095	215	65,0	3525	2	TT 12095	240	79,6	4030	4	
114	934,3	921,81	TS 12114	140	76	3030	1	TD 12114	215	102,0	4040	2						




①




②



③



④



⑤

1" 1/4 x 3/4" - 31,75 x 19,56 mm

20B - 1-2-3 - DIN 8187 - ISO/R 606

CATENA:	CHAIN:	KETTE:	CHAÎNE:	CADENA:	ISO mm
Passo	Pitch	Teilung	Pas	Paso	31,75
Larghezza interna	Internal width	Innere Breite	Largeur interieure	Ancho interno	19,56
Rullo ø	Roller ø	Rollen ø	ø du rouleau	Rodillo ø	19,05

PIGNONE	SPROCKETS	KETTENRÄDER	PIGNONS	PIÑONES	ISO mm
Raggio dente r	Tooth radius r	Radius r	Rayon de denture r	Radio diente r	r 32,0
Larghezza raggio C	Radius width C	Breite C	Largeur de rayon C	Ancho radio C	C 3,5
Largh. dente h ₁	Tooth width h ₁	Zahnbreite h ₁	Larg. de denture h ₁	Ancho diente h ₁	h₁ 18,5
Largh. dente L	Tooth width L	Zahnbreite L	Larg. de denture L	Ancho diente L	L 18,2
Largh. dente h ₂	Tooth width h ₂	Zahnbreite h ₂	Larg. de denture h ₂	Ancho diente h ₂	h₂ 54,6
Largh. dente h ₃	Tooth width h ₃	Zahnbreite h ₃	Larg. de denture h ₃	Ancho diente h ₃	h₃ 91,0

Acciaio Steel Stahl Acier Acero = C 45 E - UNI EN 10083-1

Z	D _e	D _p	TS				Esecuz. tipo / Type Typ / Type Tpo
			cod.	d	H	per Bussola / for Bush für Buchse / pour Moyeux amovibles para Casquillos cónicos	
13	147,8	132,65	TS 13013	90	32	2012	1
14	157,8	142,68	TS 13014	90	32	2012	1
15	167,9	152,72	TS 13015	108	45	2517	1
16	177,9	162,75	TS 13016	108	45	2517	1
17	187,9	172,78	TS 13017	108	45	2517	1
18	198,0	182,85	TS 13018	108	45	2517	1
19	208,1	192,91	TS 13019	108	45	2517	1
20	218,1	202,98	TS 13020	108	45	2517	1
21	228,2	213,04	TS 13021	108	45	2517	1
22	238,3	223,11	TS 13022	108	45	2517	1
23	248,3	233,17	TS 13023	108	45	2517	1
24	258,4	243,23	TS 13024	108	45	2517	1
25	268,5	253,33	TS 13025	108	45	2517	1
27	288,6	273,40	TS 13027	150	51	3020	1
30	318,9	303,75	TS 13030	150	51	3020	1
38	399,6	384,49	TS 13038	160	51	3020	1
45	470,3	455,17	TS 13045	160	51	3020	1
57	591,5	576,36	TS 13057	160	51	3020	1
76	783,5	768,32	TS 13076	160	51	3020	1


Pignoni per bussole coniche temprati ad induzione sui denti (45 ÷ 55 HRC)

Taper bored sprockets with induction hardened teeth (45 ÷ 55 HRC)

Kettenräder für Spannbuchse mit gehärteten zähnen (45 ÷ 55 HRC)

Pignons à moyeu amovible avec denture traitée (45 ÷ 55 HRC)

Piñones para casquillos cónicos con dientes tratados (45 ÷ 55 HRC)



①

Materiale C 45 E
UNI EN 10083-1

Material C 45 E
UNI EN 10083-1

Werkstoff C 45 E
UNI EN 10083-1

Matière C 45 E
UNI EN 10083-1

Material C 45 E
UNI EN 10083-1

3/8" x 7/32" - 06B R. 6,35

Z	D _e	D _p	TS					Esecuz. tipo Type Typ Tipo
			cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos		
17	55,3	51,83	TS 05T17	45	22	1008	1	
18	58,3	54,85	TS 05T18	45	22	1008	1	
19	61,3	57,87	TS 05T19	45	22	1008	1	
20	64,3	60,89	TS 05T20	46	22	1008	1	
21	68,0	63,91	TS 05T21	46	22	1008	1	
22	71,0	66,93	TS 05T22	50	22	1008	1	
23	73,5	69,95	TS 05T23	63	25	1210	1	
24	77,0	72,97	TS 05T24	63	25	1210	1	
25	80,0	76,02	TS 05T25	63	25	1210	1	
26	83,0	79,02	TS 05T26	63	25	1210	1	
27	86,0	82,02	TS 05T27	63	25	1210	1	
28	89,0	85,07	TS 05T28	63	25	1210	1	
30	94,7	91,12	TS 05T30	63	25	1210	1	

1/2" x 5/16" - 08B R. 8,51

Z	D _e	D _p	TS					Esecuz. tipo Type Typ Type Tipo
			cod.	d	H	per Bussola for Bush für Buchse pour Moyeux amovibles para Casquillos cónicos		
15	65,5	61,90	TS 09T15	45	22	1008	1	
16	69,5	65,10	TS 09T16	50	22	1108	1	
17	73,6	69,11	TS 09T17	60	25	1210	1	
18	77,8	73,14	TS 09T18	60	25	1210	1	
19	81,7	77,16	TS 09T19	63	25	1210	1	
20	85,8	81,19	TS 09T20	71	25	1610	1	
21	89,7	85,22	TS 09T21	71	25	1610	1	
22	93,8	89,24	TS 09T22	71	25	1610	1	
23	98,2	93,27	TS 09T23	76	25	1610	1	
24	101,8	97,29	TS 09T24	76	25	1610	1	
25	105,8	101,33	TS 09T25	76	25	1610	1	
26	110,0	105,36	TS 09T26	76	25	1610	1	
27	114,4	109,40	TS 09T27	76	25	1610	1	
28	118,0	113,42	TS 09T28	90	32	2012	1	
30	126,1	121,50	TS 09T30	90	32	2012	1	

5/8" x 3/8" - 10B R. 10,16

13	73,0	66,32	TS 10T13	47	22	1008		1
14	78,0	71,34	TS 10T14	52	22	1108		1
15	83,0	76,36	TS 10T15	60	25	1210		1
16	88,0	81,37	TS 10T16	70	25	1610		1
17	93,0	86,36	TS 10T17	71	25	1610		1
18	98,3	91,42	TS 10T18	75	25	1610		1
19	103,3	96,45	TS 10T19	75	25	1610		1
20	108,4	101,49	TS 10T20	75	25	1610		1
21	113,4	106,52	TS 10T21	76	25	1610		1
22	118,0	111,55	TS 10T22	76	25	1610		1
23	123,4	116,58	TS 10T23	76	25	1610		1
24	128,3	121,62	TS 10T24	90	32	1610		1
25	134,0	126,66	TS 10T25	90	32	2012		1
26	139,0	131,70	TS 10T26	90	32	2012		1
27	144,0	136,75	TS 10T27	90	32	2012		1
28	148,7	141,78	TS 10T28	90	32	2012		1
30	158,8	151,87	TS 10T30	90	32	2012		1

3/4" x 7/16" - 12B R. 12,07

13	87,5	79,59	TS 11T13	60	25	1210		1
14	93,6	85,61	TS 11T14	70	25	1610		1
15	99,8	91,63	TS 11T15	70	25	1610		1
16	105,5	97,65	TS 11T16	75	25	1610		1
17	111,5	103,67	TS 11T17	76	25	1610		1
18	118,0	109,71	TS 11T18	90	32	2012		1
19	124,2	115,75	TS 11T19	90	32	2012		1
20	129,7	121,78	TS 11T20	90	32	2012		1
21	136,0	127,82	TS 11T21	102	45	2517		1
22	141,8	133,86	TS 11T22	102	45	2517		1
23	149,0	139,90	TS 11T23	108	45	2517		1
24	153,9	145,94	TS 11T24	108	45	2517		1
25	160,0	152,00	TS 11T25	108	45	2517		1
26	165,9	158,04	TS 11T26	108	45	2517		1
27	172,3	164,00	TS 11T27	108	45	2517		1
28	178,0	170,13	TS 11T28	108	45	2517		1
30	190,5	182,25	TS 11T30	108	45	2517		1

1" x 17,2 - 16B R. 15,88

13	117,0	106,12	TS 12T13	73	25	1610		1
14	125,0	114,15	TS 12T14	76	25	1610		1
15	133,0	122,17	TS 12T15	76	25	1610		1
16	141,0	130,20	TS 12T16	90	32	2012		1
17	149,0	138,22	TS 12T17	90	32	2012		1
18	157,0	146,28	TS 12T18	108	45	2517		1
19	165,2	154,33	TS 12T19	108	45	2517		1
20	173,2	162,38	TS 12T20	108	45	2517		1
21	181,2	170,43	TS 12T21	110	45	2517		1
22	189,3	178,48	TS 12T22	110	45	2517		1
23	197,5	186,53	TS 12T23	110	45	2517		1
24	205,5	194,59	TS 12T24	110	45	2517		1
25	213,5	202,66	TS 12T25	110	45	2517		1
26	221,6	210,72	TS 12T26	110	45	2517		1
27	229,6	218,79	TS 12T27	110	45	2517		1
28	237,7	226,85	TS 12T28	110	45	2517		1
30	254,0	243,00	TS 12T30	140	51	3020		1

1" 1/4 x 3/4" - 20B R. 19,05

13	147,8	132,65	TS 13T13	90	32	2012		1
15	167,9	152,72	TS 13T15	108	45	2517		1
17	187,9	172,78	TS 13T17	108	45	2517		1
19	208,1	192,91	TS 13T19	108	45	2517		1
21	228,2	213,04	TS 13T21	108	45	2517		1
23	248,3	233,17	TS 13T23	108	45	2517		1
25	268,5	253,33	TS 13T25	108	45	2517		1
27	288,6	273,40	TS 13T27	150	51	3020		1
30	318,9	303,75	TS 13T30	150	51	3020		1