




CASQUILLO FIJO (Sin Rodillos)

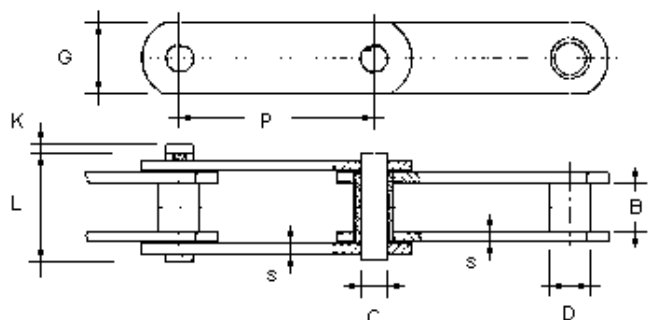


RODILLO SALIENTE

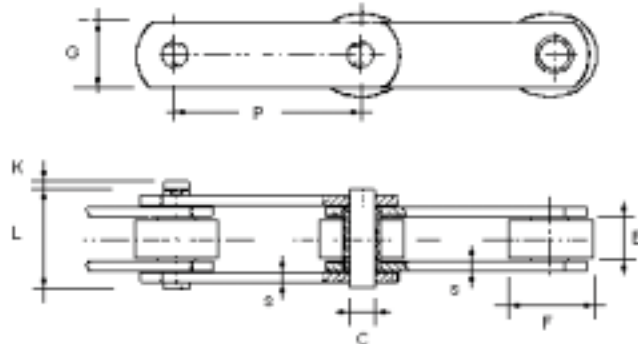

RODILLO PEQUEÑO

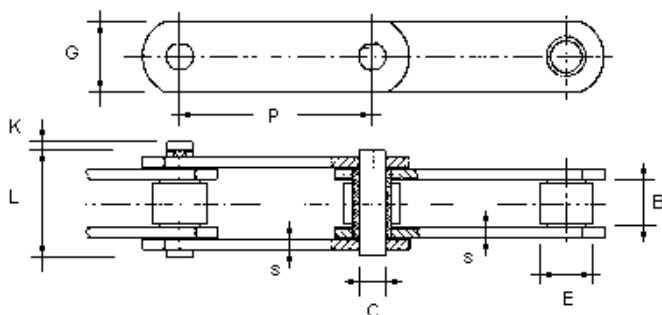

RODILLO CON PESTAÑA

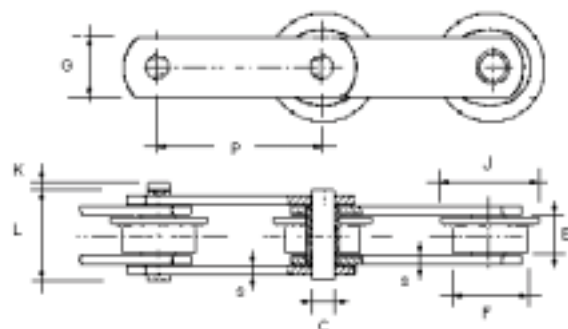

Ref.  Cad.	Carga  Rotura	PASO  P	CADENAS LISAS Serie B											
			Ancho	Ø	Ø	RODILLOS			BRIDAS		ANCHOS		Superficie Articul.	
	Interior		eje	Casq	Peq.	Salien	Pest.	Ancho	Grueso					
	B		C	D	E	F	J	G	S	L max	K max	.cm2		
B-034	3.400	50 75 90 100 125 150	15,2	14	18	23	31,8	42	26	4	39	7	3,24	
B-068	6.800	90 100 125 150 175 200 250	19,1	19	24	44,4	47,6	60	40	4-5	46	8	5,53	
B-136	13.600	125 150 175 200 250	25,4	26	32	50,8	66,7	73	50	6-7	61	9	10,75	
B-204	20.400	150 175 200 225 250	38,1	32	38		88,9	100	60	8-10	84	11	19,47	
B-350	35.000	150 175 200 225 250 300	38,1	32	38		88,9	100	60	10-12	94	11	20,81	

- Otros pasos intermedios se fabrican bajo demanda.